

Switched socket

Art.no 18-2524 Model ZD101UK: 13A 1 GANG SWITCHED SOCKET
18-2525 ZD201UK: 13A 2 GANG SWITCHED SOCKET

Please read the entire instruction manual before use and save it for future reference. We reserve the right for any errors in text or images and for making any necessary technical changes to this document. If you should have any questions concerning technical problems please contact our Customer Services.

Important

These accessories are to be installed in accordance with the current IEE wiring regulations.


WARNING: FOR METAL PLATES ONLY!

The Plastic Wall Gasket MUST BE FITTED if provided, to prevent any chemical reaction.

Installation procedure

1. For additional safety, remove the fuse or switch off the circuit breaker of the circuit concerned at the fuse box.
2. Loosen the terminal screws.
3. Before fitting, check for damaged cable insulation.
4. Insert the "Red" or "Brown" insulated conductor into the terminal marked "L".
The "Black" or "Blue" insulated conductor into the terminal marked "N".
The "Green/Yellow" insulated two way switching loop in loop out.
Alternative two way switching into the terminal marked "E".
5. Tighten all terminal screws.
6. Fix the socket into wall by means of 2 mounting screws provided.

These accessories must only be installed by a competent person.

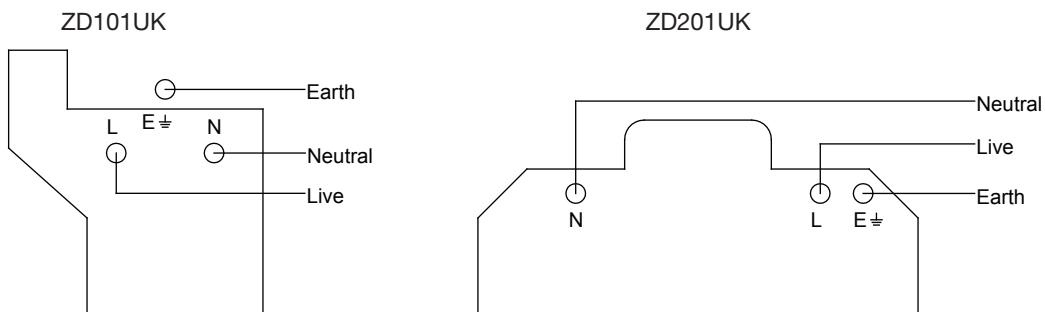

Technical details

ZD101UK, ZD201UK: 13 A, 250 V AC

Cleaning

Polish only with a soft clean dry cloth. USE NO FLUID.

Disposal

Follow local ordinances when disposing of this product. If you are unsure about how to dispose of this product contact your municipality.