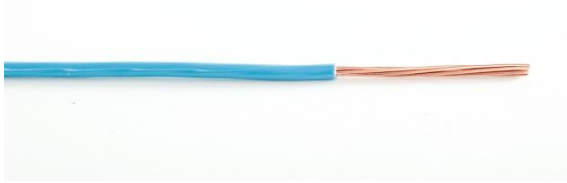


**FQ, H07Z1-R 1,5**

**Application:**

H07Z1-R is a halogen free insulated house wiring cable for fixed installation in conduit- or duct systems. The insulation should be protected from direct UV light.

**House wiring cable:**

Max conductor temperature: -25°C/+70°C

Voltage Rating Uo/U: 450/750V

**Standards:**

Conductor: IEC 60228,2

Construction: EN 50525-3-31

Flame retardant: IEC 60332-1

Halogen content: IEC 60754-1

<b>Construction:</b>	
Conductor	Stranded class 2
Insulation	Polyoefin
Marking	EX. H07Z1-R 1,5mm <sup>2</sup> AMOI CE
Color	Customers choice
Packing	Ex. Cardboard box, Coil, Bobbin, Customers choice

Type Code	Cross-section [mm <sup>2</sup> ]	Insulation thickness [mm]	Outer diameter [mm]	Copper weight [kg/km]	Packing
FQ/H07Z1-R	1,5	0,7	3,0	13,4	Customers choice
FQ/H07Z1-R	2,5	0,8	3,6	21,3	Customers choice